



Casters

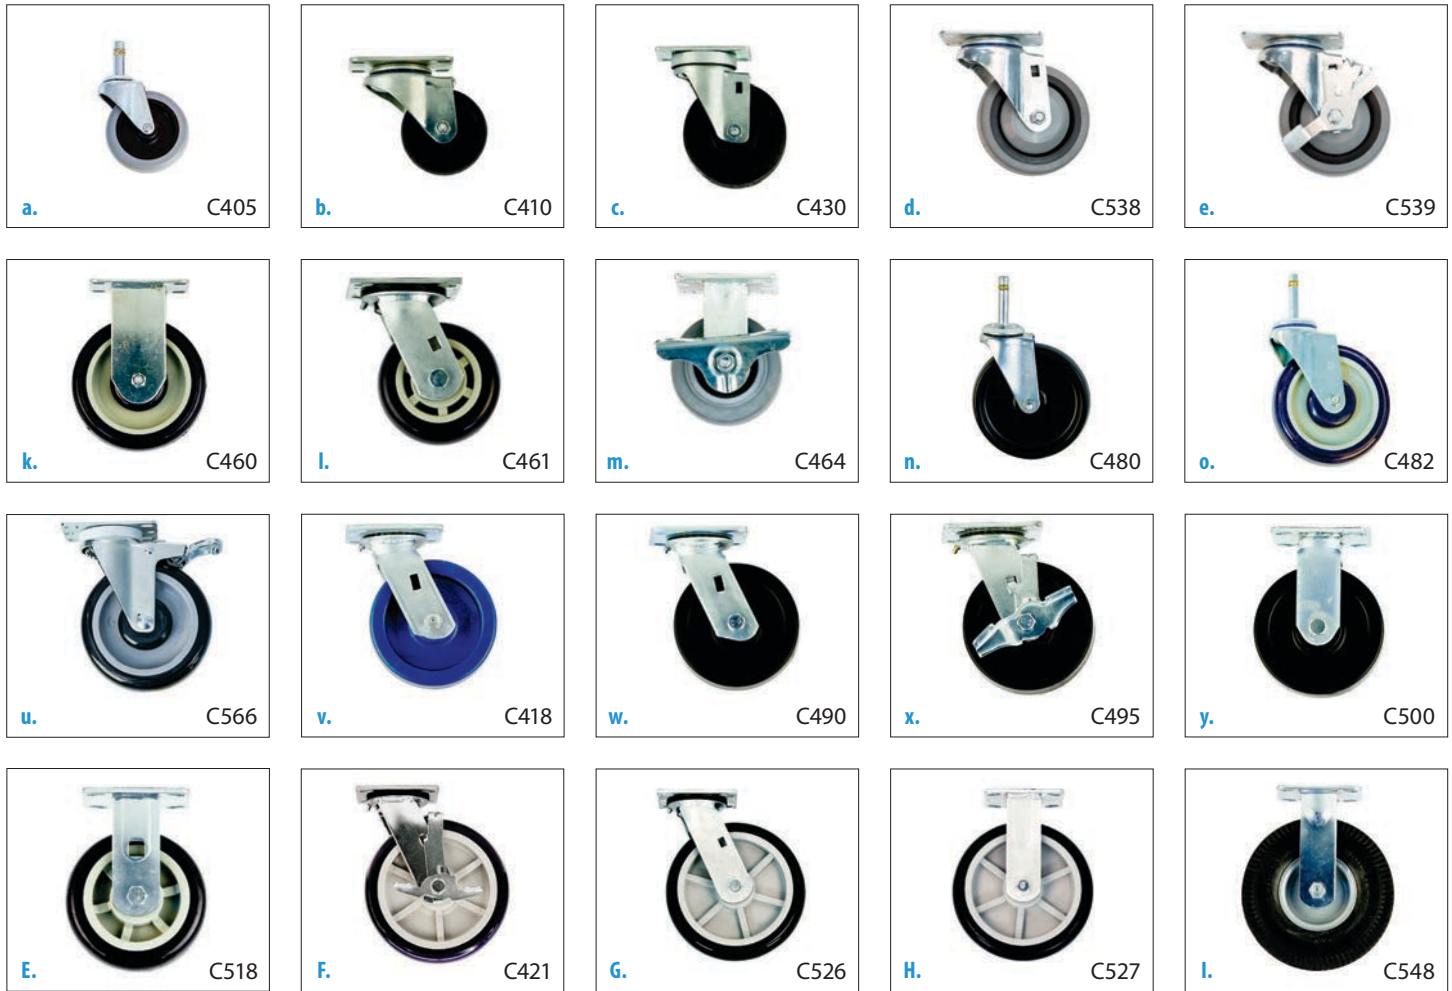

Model No.	Caster Size	Caster Type	Caster Description	Wheel Material	Maximum Temperature	Weight Capacity (lbs.)	Stem Diameter/ Hole Pattern	List Price
a. C405	3" x 7/16"	Stem	Swivel	Polyurethane Wheel	180°	125	7/16" Stem	\$ 40
b. C410	3" x 13/8"	Plate	Swivel	Polyolefin Wheel	140°	200	13/4" x 3"	\$ 63
c. C430	4" x 1 1/2"	Plate	Swivel	Hi-temp Wheel (above 400°)	550° intermittent 425° continuous	400	13/4" x 3"	\$ 89
d. C538	4" x 1 1/4"	Plate	Swivel	TPR Wheel,	140°	250	13/4" x 3"	\$ 78
e. C539	4" x 1 1/4"	Plate	Swivel w/ brake	TPR Wheel	140°	250	13/4" x 3"	\$ 128
f. C440	5" x 1 3/8"	Stem	Swivel w/ brake	Polyolefin Wheel	140°	300	1" Stem	\$ 77
g. C447	5" x 1 3/8"	Stem	Swivel w/ brake	Polyolefin Wheel	140°	200	1/2" Stem	\$ 104
h. C450	5" x 1 3/8"	Plate	Swivel	Polyolefin Hub, Polyurethane Tread	180°	250	13/4" x 3"	\$ 71
i. C453	5" x 1 1/4"	Plate	Swivel	Polyolefin Hub, Polyurethane Tread	140°	225	13/4" x 3"	\$ 65
j. C455	5" x 1 3/8"	Plate	Swivel w/ brake	Polyolefin Hub, Polyurethane Tread	180°	250	13/4" x 3"	\$ 85
k. C460	5" x 1 3/8"	Plate	Rigid	Polyolefin Hub, Polyurethane Tread	180°	250	13/4" x 3"	\$ 77
l. C461	5" x 2"	Plate	Swivel	Polyolefin Hub, Polyurethane Tread	140°	800	3" x 3"	\$ 130
m. C464	5" x 2"	Plate	Rigid w/ brake	Polyolefin Hub, TPR Tread	120°	350	3" x 3"	\$ 143
n. C480	5" x 1"	Stem	Swivel	Polyolefin Wheel	130°	135	7/16" Stem	\$ 54
o. C482	5" x 1 3/8"	Stem	Swivel	Polyolefin Hub, Polyurethane Tread	180°	250	7/16" Stem	\$ 69
p. C483	5" x 1 3/8"	Stem	Swivel w/ brake	Polyolefin Hub, Polyurethane Tread	180°	250	7/16" Stem	\$ 77
q. C485	5" x 1"	Stem	Swivel w/ brake	Polyolefin Wheel	130°	135	7/16" Stem	\$ 60
r. C557	5" x 1 1/4"	Stem	Swivel	TPR Wheel, Synthetic Rig	150°	250	7/16" Stem	\$ 108
s. C558	5" x 1 1/4"	Plate	Swivel	TPR Wheel, Synthetic Rig	150°	250	13/4" x 3"	\$ 130
t. C558B	5" x 1 1/4"	Plate	Swivel w/brake	TPR Wheel, Synthetic Rig	150°	250	13/4" x 3"	\$ 152
u. C566	5" x 1 3/8"	Plate	Swivel w/total lock	Polyolefin Hub, Polyurethane Tread	180°	350	13/4" x 3"	\$ 94

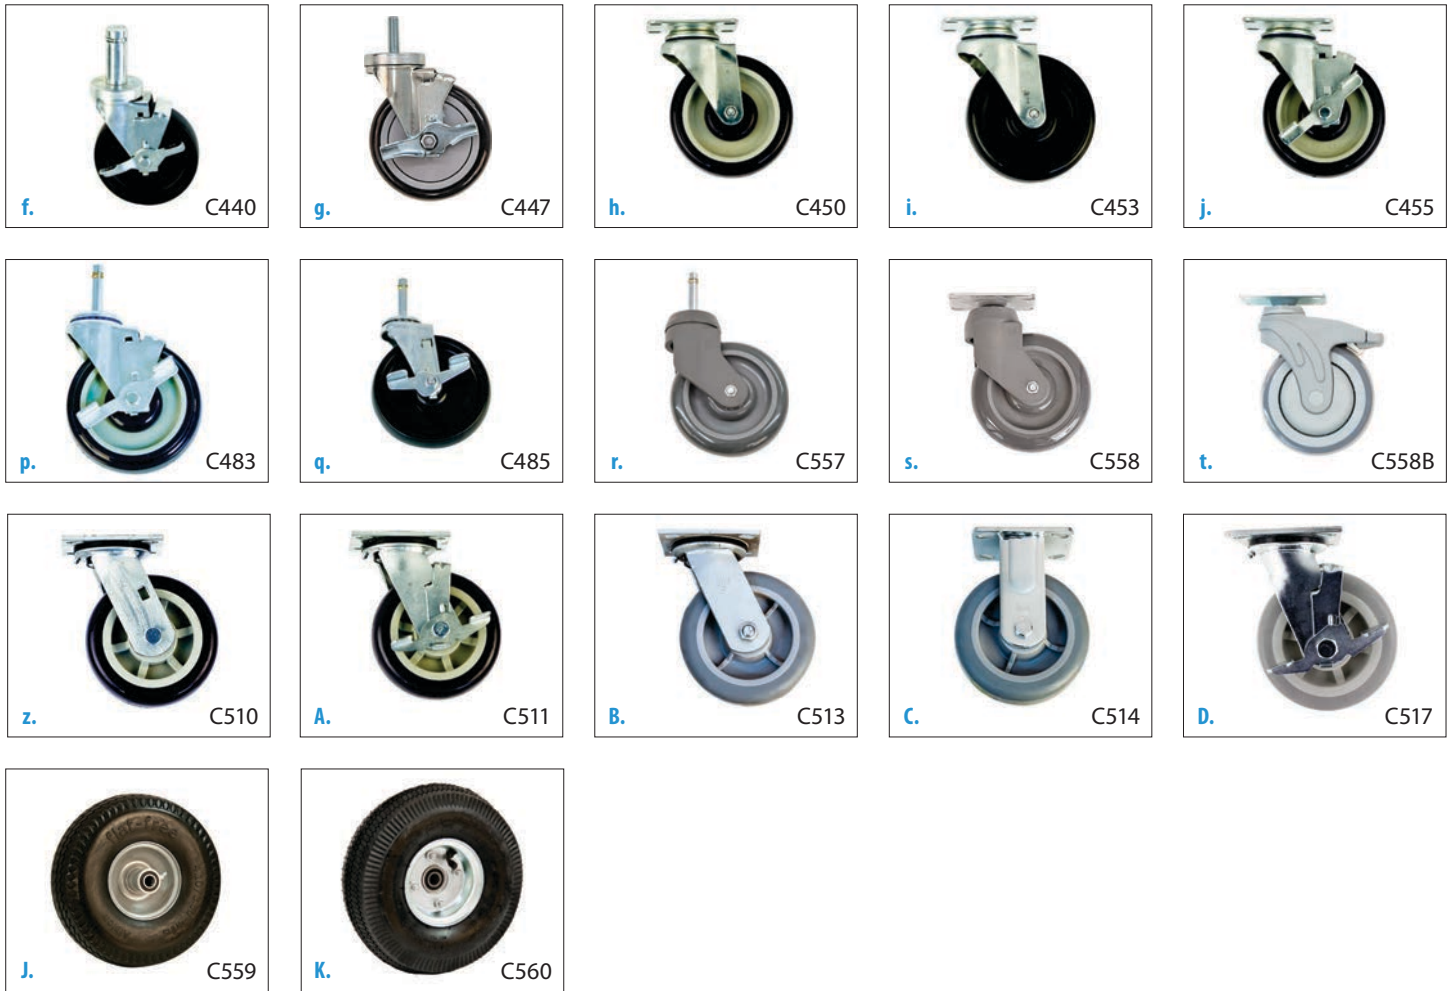

Model No.	Caster Size	Caster Type	Caster Description	Wheel Material	Maximum Temperature	Weight Capacity (lbs.)	Stem Diameter/ Hole Pattern	List Price
v. C418	6" x 2"	Plate	Swivel	K-Urethane Wheel	180°	700	3" x 3"	\$ 256
w. C490	6" x 2"	Plate	Swivel	Polyolefin Wheel	190°	700	3" x 3"	\$ 144
x. C495	6" x 2"	Plate	Swivel w/ brake	Polyolefin Wheel	190°	700	3" x 3"	\$ 152
y. C500	6" x 2"	Plate	Rigid	Polyolefin Wheel	190°	700	3" x 3"	\$ 105
z. C510	6" x 2"	Plate	Swivel	Polyolefin Hub, Polyurethane Tread	140°	700	3" x 3"	\$ 130
A. C511	6" x 2"	Plate	Swivel w/ brake	Polyolefin Hub, Polyurethane Tread	140°	700	3" x 3"	\$ 184
B. C513	6" x 2"	Plate	Swivel	TPR "Softie" A70	150°	800	3" x 3"	\$ 150
C. C514	6" x 2"	Plate	Rigid	TPR "Softie" A70	150°	800	3" x 3"	\$ 142
D. C517	6" x 2"	Plate	Swivel w/ brake	TPR "Softie" A70	150°	800	3" x 3"	\$ 166
E. C518	6" x 2"	Plate	Rigid	Polyolefin Hub, Polyurethane Tread	140°	700	3" x 3"	\$ 108
F. C421	8" x 2"	Plate	Swivel w/ brake	Polyolefin Hub, Polyurethane Tread	185°	900	3" x 3"	\$ 193
G. C526	8" x 2"	Plate	Swivel	Polyolefin Hub, Polyurethane Tread	185°	900	3" x 3"	\$ 181
H. C527	8" x 2"	Plate	Rigid	Polyolefin Hub, Polyurethane Tread	185°	800	3" x 3"	\$ 150
I. C548	8" x 2"	Plate	Rigid	Metal Hub, Carefree	140°	300	3" x 3"	\$ 276
J. C559	10" x 3½"	Axle	Flat Free	Steel Hub, Non-scuff Polyurethane	N/A	400	⅝" DIA	\$ 250
K. C560	10" x 3½"	Axle	Pneumatic	Steel Hub / 4-ply Rubber	N/A	400	⅝" DIA	\$ 172

Casters



Model No.	Caster Size	Caster Type	Caster Description	Wheel Material	Maximum Temperature	Weight Capacity (lbs.)	Stem Diameter/ Hole Pattern
a.	C405	3" x 7/16"	Stem Swivel	Polyurethane Wheel	180°	125	7/16" Stem
b.	C410	3" x 13/8"	Plate Swivel	Polyolefin Wheel	140°	200	1 3/4" x 3"
c.	C440	5" x 13/8"	Stem Swivel w/ brake	Polyolefin Wheel	140°	300	1" Stem
d.	C480	5" x 1"	Stem Swivel	Polyolefin Wheel	130°	135	7/16" Stem
e.	C482	5" x 1 3/8"	Stem Swivel	Polyolefin Hub, Polyurethane Tread	180°	250	7/16" Stem
f.	C485	5" x 1"	Stem Swivel w/ brake	Polyolefin Wheel	130°	135	7/16" Stem
g.	C557	5" x 1 1/4"	Stem Swivel	TPR Wheel, Synthetic Rig	150°	250	7/16" Stem
h.	C450	5" x 1 3/8"	Plate Swivel	Polyolefin Hub, Polyurethane Tread	180°	250	1 3/4" x 3"
i.	C453	5" x 1 1/4"	Plate Swivel	Polyolefin Hub, Polyurethane Tread	140°	225	1 3/4" x 3"
j.	C455	5" x 1 3/8"	Plate Swivel w/ brake	Polyolefin Hub, Polyurethane Tread	180°	250	1 3/4" x 3"
k.	C460	5" x 1 3/8"	Plate Rigid	Polyolefin Hub, Polyurethane Tread	180°	250	1 3/4" x 3"
l.	C461	5" x 2"	Plate Swivel	Polyolefin Hub, Polyurethane Tread	140°	800	3" x 3"
m.	C462	5" x 2"	Plate Swivel w/ brake	Polyolefin Hub, Polyurethane Tread	140°	800	3" x 3"
n.	C463	5" x 2"	Plate Rigid	Polyolefin Hub, Polyurethane Tread	140°	800	3" x 3"
o.	C699	5" x 2"	Plate Rigid	Spring Loaded	140°	800	3" x 3"
p.	C490	6" x 2"	Plate Swivel	Polyolefin Wheel	190°	700	3" x 3"
q.	C495	6" x 2"	Plate Swivel w/ brake	Polyolefin Wheel	190°	700	3" x 3"
r.	C500	6" x 2"	Plate Rigid	Polyolefin Wheel	190°	700	3" x 3"
s.	C510	6" x 2"	Plate Swivel	Polyolefin Hub, Polyurethane Tread	140°	700	3" x 3"
t.	C511	6" x 2"	Plate Swivel w/ brake	Polyolefin Hub, Polyurethane Tread	140°	700	3" x 3"

Casters



	Model No.	Caster Size	Caster Type	Caster Description	Wheel Material	Maximum Temperature	Weight Capacity (lbs.)	Stem Diameter/ Hole Pattern
u.	C513	6" x 2"	Plate	Swivel	TPR "Softie" A70	150°	800	3" x 3"
v.	C514	6" x 2"	Plate	Rigid	TPR "Softie" A70	150°	800	3" x 3"
w.	C518	6" x 2"	Plate	Rigid	Polyolefin Hub, Polyurethane Tread	140°	700	3" x 3"
x.	C616	6" x 2"	N/A	Wheel Only	Polyolefin Hub, Polyurethane Tread	140°	1000	N/A
y.	C642	6" x 2"	Plate	Rigid w/ Hex Brake	Polyurethane Wheel	140°	1000	3" x 3"
z.	C421	8" x 2"	Plate	Swivel w/ brake	Polyolefin Hub, Polyurethane Tread	185°	900	3" x 3"
A.	C469	8" x 2"	Plate	Rigid w/ Hex Brake	Polyurethane Wheel	140°	1200	3" x 3"
B.	C516	8" x 2"	Plate	Swivel	Pneumatic	140°	300	3" x 3"
C.	C519	8" x 2"	Plate	Swivel w/ brake	Pneumatic	140°	300	3" x 3"
D.	C526	8" x 2"	Plate	Swivel	Polyolefin Hub, Polyurethane Tread	185°	900	3" x 3"
E.	C527	8" x 2"	Plate	Rigid	Polyolefin Hub, Polyurethane Tread	185°	800	3" x 3"
F.	C598	8" x 2"	N/A	Wheel Only	Polyolefin Hub/Polyurethane Tread	140°	500	N/A
G.	C559	10" x 3 1/2"	Axle	Flat Free	Steel Hub, Non-scutt Polyurethane	N/A	400	5/8" DIA
H.	C560	10" x 3 1/2"	Axle	Pneumatic	Steel Hub / 4-ply Rubber	N/A	400	5/8" DIA